

Oil and Gas Reserves Exploration by Generalized Form of Non-linear Real-Time Expert Seismology

E.G. Ladopoulos
Interpaper Research Organization
8, Dimaki Str.
Athens, GR - 106 72, Greece
eladopoulos@interpaper.org

Abstract

By using a non-linear 3-D elastic waves real - time expert system, then the new theory of "*Real-Time Expert Seismology*" is proposed, for the exploration of the on-shore and off-shore oil and gas reserves all over the world. This high innovative and groundbreaking technology is working under Real Time Logic for searching the on-shore and off-shore petroleum reserves developed on the continental crust and on deeper water ranging from 300 to 2500 m, or even deeper. Hence, this real - time expert system, will be the best device for the exploration of the continental margin areas (shelf, slope and rise) and the very deep waters, as well. The new technology can be used at any depth of seas and oceans all over the world and for any depth in the subsurface of existing oil reserves. Furthermore, the proposed real-time expert system will be suitable for the exploration of on-shore petroleum and gas, as well. As the main objectives for exploration of on-shore and off-shore petroleum and gas reserves are to locate, characterize and evaluate the size of these fuel resources all over the world. then there is a research and development responsibility for the acquisition and analysis of all the geophysical, geological and reservoir engineering data for the land and the seas all over the world, in order to be explored their hydrocarbon reserves. Thus, through the proposed modern technology of "*Real-time Expert Seismology*", it will be possible the exploration of a significant part of on-shore and off-shore oil and gas reserves very fast and through a low cost.

Key Word and Phrases

Real-time Expert Seismology, Real - Time Logic, Non-linear Real - Time Expert System, Generic Technology, Off-shore Oil and Gas Reserves, On-shore Oil and Gas Reserves.

1. Introduction

All big oil companies and scientific petroleum institutes over the world have a feeling that the unexplored on-shore and off-shore petroleum & gas resources should be too many, many times more than the terrestrial reserves of Middle - East. Also, many recent test drillings in the Continental Shelf of Europe and rest world have shown the existence of significant petroleum and gas reserves. Oil and gas will remain the most important global energy sources over several decades.

Sufficient resources are or will be available to meet demand. This statement is based on geological consideration:

- (a) Many unexplored or partly explored zones remain.
- (b) There are still many offshore or frontier zones, although it is well understood that their exploration will necessitate a satisfactory price of crude oil.
- (c) Disagreement amongst experts regarding the "ultimate recoverable resources" is minimal. All experts agree that there are many unexplored resources, mostly offshore, to be explored.

Thus, new technologies will have a major impact in the future. Through the technological progress to be achieved in the future exploration, then major reductions in costs can be expected. It is believed that the expected progress of enhanced oil recovery methods will reduce their future technical cost substantially.

Furthermore, the usual probability considerations indicate that off-shore oil reserves will be found in areas of thick sedimentary sequences developed on the continental crust. So, if this is true, then the continental margin areas (shelf, slope and rise) should offer good prospects of containing petroleum and gas resources. However, up to present the potential of sediments both on and off the

shelf remains unquantified. Also, there are many deep waters prospects in the seas and oceans all over the world, but because of the paucity of the available information it is not possible at present to quantify the amounts that may be recoverable from them. On the contrary, there is a considerable feeling that very deep waters (2000 to 3000 m, or even more) offer good possibilities to find hydrocarbon fuels. In the field of exploration, the likelihood of discoveries can be increased by modeling the oil basins and drawing three-dimensional geophysics.

Since 1920 the basic and prevalent theory on oil and gas reserves exploration, has been "Reflection Seismology" and "Refraction Seismology". According to the above methods the basic idea is to collect reflections of elastic (seismic) waves and then through various mathematical operations, by using Snell's law and Zoeppritz equations to convert them to maps of the earth's structure. [1] - [9]. Thus, the methods of "Reflection Seismology" and "Refraction Seismology" for almost a century, has been used with several improvements for hydrocarbon resources exploration.

On the contrary, by the current investigation and research for the on-shore and off-shore oil and gas reserves exploration the new theory of "*Real-Time Expert Seismology*" is proposed, as was recently introduced by E.G.Ladopoulos [10]-[12]. Also, this theory is an extension of the non-linear methods for fluid mechanics as proposed by E.G.Ladopoulos et al. [13]-[24]. So, "*Real-Time Expert Seismology*" is a very "*innovative*" and "*groundbreaking*" method on hydrocarbon reserves exploration. According to the new technology a non-linear 3-D elastic waves real - time expert system is proposed for the exploration of the oil and gas resources all over the world, including the off-shore oil reserves, of the seas and oceans in the whole world. This new Technology will work under Real Time Logic [25]-[29] for searching off-shore fuel reserves developed on the continental crust and on deeper water ranging from 300 to 2500 or 3000 m, or even much more. Hence, the proposed real - time expert system will be the best device for the exploration of the continental margin areas (shelf, slope and rise) and the very deep waters, too. Also, this expert system will be suitable for the exploration of on-shore hydrocarbon reserves, as well.

There are many basic benefits of the new theory of "*Real-Time Expert Seismology*" in comparison to the existing theories of "Reflection Seismology" and "Refraction Seismology". Some of them are the following:

A) The new method "*Real-Time Expert Seismology*" is based on the special form of the geological anticlines, normal faults, reverse faults or deformations caused by intrusion of the bottom of the sea, in order to decide which areas of the bottom have the most possibilities to include oil and gas reserves.

On the other hand, the existing theory is only based to the best chance and do not include any theoretical and sophisticated model. At present oil companies by using the existing methods of "Reflection Seismology" and "Refraction Seismology" must do a lot of expensive test drillings in big areas of seas, if they want to have a chance to find oil and gas reserves.

B) The new technology of elastic (sound) waves is based on the difference of the speed of the sound waves which are travelling through solid, liquid, or gas. In a solid the elastic waves are moving faster than in a liquid and the air, and in a liquid faster than in the air. On the contrary, existing theory is based on the application of Snell's law and Zoeppritz equations, which are not giving good results, as these which we are expecting by the new method.

C) The new method "*Real-Time Expert Seismology*" is based on a Real-time Expert System working under Real Time Logic, that gives results in real time, which means every second. Existing theory do not include real time logic.

From the above described analysis it can be well understood the evidence of the applicability of the new method of "*Real-Time Expert Seismology*". Also its novelty, as it is based mostly on a theoretical and very sophisticated Real-time Expert model and not to practical tools like the existing methods.

2. Generalized Form of Real-time Expert Seismology

In general, off-shore operations consist of 90% of all data collected worldwide for oil and gas reserves exploration. The depth of the drillings are usually up to 6000 m, but sometimes in order to find big oil and gas reserves they may extend to 10,000 m or even to 12,000 m or 15,000 m.

E.G. Ladopoulos

Beyond the above, big oil companies and research organisations by studying geological surveys all over the world indicate that oil reserves do not necessarily end at the edge of the continental shelf. Hence, there is serious expectation that main resources will be found in areas of thick sedimentary sequences developed on the continental crust. So, there are good possibilities for finding off-shore oil and gas reserves in deeper waters, too, ranging up to 2500 m to 3000 m, or even more.

Also, the behavior of a reservoir and of the wells drilled to produce it, depends not only on the properties of the oil and gas, but also on a series of factors that may be termed as the "*properties of the environment*". Among these factors are such items as capillary-pressure effects, the reaction of rock when subjected to high stress, pressure and temperature gradients at the shallower levels in the Earth's crust and the influences of the compressibility as pressure are reduced by fluid withdrawals. Setting the stage for all studies of reservoir performance is the physical nature of the reservoir itself, its location, structure, lithology, internal geometry and extent. There are four basic conditions that must be satisfied in order a geological formation, or a part thereof, should form a suitable reservoir, for example for the accumulation of hydrocarbons. These are porosity, permeability, seal and closure. The first defines the pore space in the rock - space in which the oil and gas may collect. Permeability is the attribute of the rock that permits the passage of fluid through it. It is in general a measure of the degree interconnectedness, of the pore space, but some reservoir (e.g. in the massive limestone deposits, or in igneous intrusions) depends for fluid flow on a network of fractures within the rock.

In addition, the seal is the "cap" of the reservoir and prevents the oil and gas from leaking away. Furthermore, closure is a measure of the vertical extent of the sealed trap or, in the case of hydrocarbon accumulation bounded below by a moving body of water, of the "height" of the sealed trap where that height is measured along a line perpendicular to the oil - water contact.

Hydrocarbons are almost certainly formed from organic material, large-scale deposits of which were gradually buried by subsequent sedimentation. Over the course of many hundreds of thousands of years the pressure of the overlying sedimentary strata, together with the moderately high temperatures that prevail at depths of a few thousands of meters, have transformed this material. It follows that almost all resources occur in porous sandstones or limestones and in sedimentary basins, and that seal or cap rock is often a clay or shale, or massive unfractured limestone having little or no permeability. Furthermore, three general categories of resources can be mentioned for off-shore reserves: structural traps, stratigraphic traps and combination traps. Sometimes there was no trap along the path of the water / hydrocarbon mixture as it moved through the formation on its journey from the source beds. Sometimes those traps that were present were insufficient in volume to hold all of the hydrocarbons in the percolating stream and sometimes the seal of the trap was not perfect. In each of these circumstances, some of the hydrocarbons moved eventually into near-surface locations where most of the light ends evaporated over the years, leaving behind a heavy tarlike residue, so thick that it would no longer flow at ambient temperatures.

Elastic waves are sound waves, usually three - dimensional which may be transmitted through matter in any phase - solid, liquid, or gas. In general, any body vibrating in air gives rise to such waves, as it alternately compresses and rarefies the air adjacent to its surfaces. Furthermore, a body vibrating in a liquid, or in contact with a solid, likewise generates similar longitudinal waves. Of course the frequency of the waves is the same as the frequency of the vibrating body that produces them. So, there are two types of elastic waves produced: a) P-waves, which are primary or "compressional" waves, and b) S-waves, or shear waves.

Furthermore, wavelength of the wave is the distance between two successive maxima (or between any two successive points in the same phase) and is denoted by l . Since the waveform, travelling with constant velocity u , advances a distance of one wavelength in a time interval of one period, then it follows that the velocity of sound waves u is given by the following relation:

$$u = l v \quad (2.1)$$

in which v denotes the frequency.

As it is obvious, the velocity u differs when the sound waves are travelling through solid, liquid, or gas. In a solid the elastic waves are moving faster than in a liquid and the air, and in a liquid faster than in the air. Thus, if somebody is searching for example for off-shore oil resources over the sea, by transmitting sound waves, then there will be a difference in the velocity of the waves in the sea, the solid bottom and in a potential reservoir.

In order to better explain the new technology, consider the example of Figure 1. In this example consider that in the bottom of the sea there is a potential petroleum reservoir. In this case, the speed of the elastic waves in the air (u_{air}), will be different from the speed in the water (u_{water}), and different from the speed in the solid bottom (u_{solid}) and different from the speed in the potential reservoir (u_{oil}), while the frequency of the elastic waves remaining the same when transmitted through every different matter.

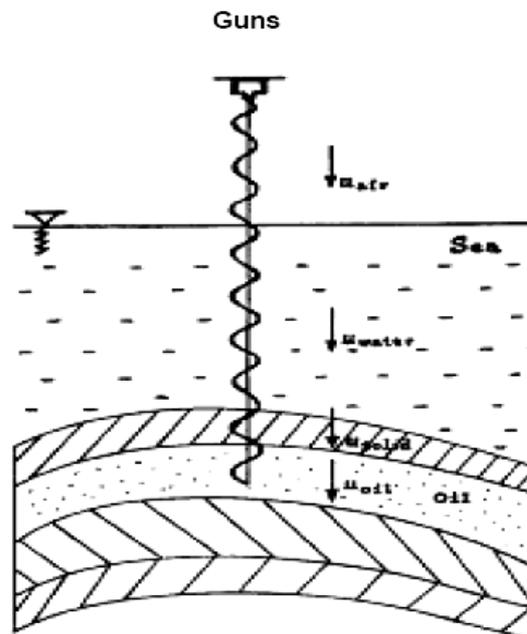


Fig. 1 Elastic Waves Method for the Exploration of Oil Reserves.

So, by the present investigation a real - time non-linear 3-D plane - polarized elastic waves expert system is proposed in order to explore the on-shore and off-shore oil and gas resources, according to the new theory of "Real-Time Expert Seismology", in contrast to the old theory of "Reflection Seismology". This new Sound Waves Technology will work under Real Time Logic for searching off-shore oil reserves developed on the continental crust and on deeper waters ranging from 300 m to 2500 m or 3000 m, or even much deeper (Figure 2). On the other hand, there are many deeper water prospects around the seas all over the world, but because of the paucity of the available information it is not possible at present to quantify the amounts that may be recoverable from them.

Thus, the proposed real - time elastic waves expert system will be the best device for the exploration of the continental margin areas (shelf, slope and rise) and the very deep waters ranging of more than 2500 ÷ 3000 m, too. Through the very modern technology of "Real-Time Expert

"Seismology", will be effected the exploration of a significant part of on-shore and off-shore oil and gas reserves very fast and by a low cost.

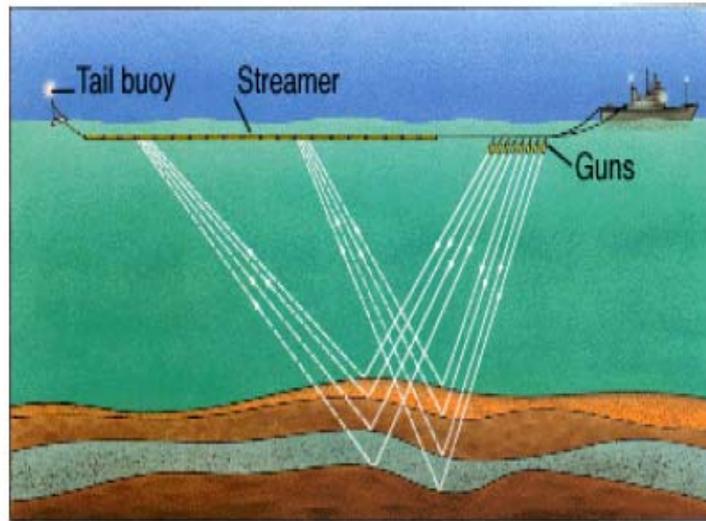


Fig. 2 Real-time Expert Seismology.

According to the proposed modern technology of "Real-Time Expert Seismology" the average velocity of the sound waves is calculated by providing important information about the composition of the solids through of which passed the sound waves. For example the velocity of the sound waves through the air is 331 m/sec, through liquid 1500 m/sec and through sedimentary rock 2000 to 5000 m/sec. Also, according to the law of Reflection the angle of reflection equals the angle of incidence (Figure 3). Then according to the new method the arrival times of the seismic waves are analyzed. After the sensor measures the precise arrival time of the wave, then the velocity of the wave can be calculated by using the following method.

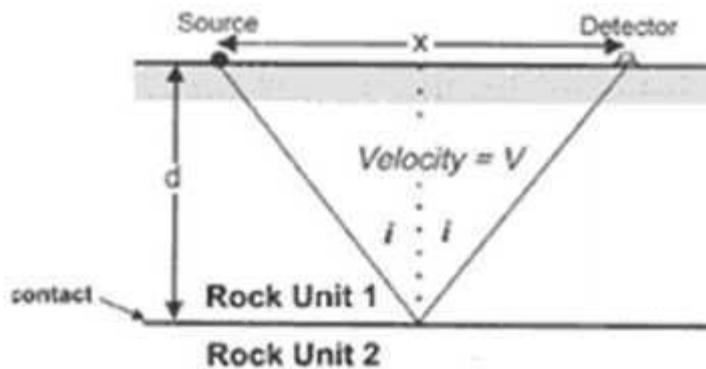


Fig. 3 Law of Reflection.

The travel time T of the seismic waves is given by the relation:

$$T = \frac{2\left(d^2 + \frac{x^2}{4}\right)^{1/2}}{v} \quad (2.2)$$

in which d denotes the depth, x the distance between source of wave and the geophone or hydrophone detector and v is the average speed.

Also, from (2.2) follows equation (2.3):

$$T^2 = \frac{4d^2 + x^2}{v^2} \quad (2.3)$$

Furthermore, the normal incident time T_o is given by the formula:

$$T_o = \frac{2d}{v} \quad (2.4)$$

From eqs (2.3) and (2.4) follows:

$$T^2 - T_o^2 = \frac{x^2}{v^2} \quad (2.5)$$

Beyond the above, from eqn (2.5) follows that the travel time curve for a constant velocity horizontal layer model is a hyperbola whose apex is at the zero-offset travel time T_o :

$$\frac{T^2}{T_o^2} - \frac{x^2}{(T_o v)^2} = 1 \quad (2.6)$$

Finally from (2.5) the mean velocity is equal to:

$$v = \frac{x}{\sqrt{T^2 - T_o^2}} \quad (2.7)$$

So, a real time expert system is proposed and the apparatus permitted excitation of any combination of elements and reception of any other, visual analysis of the responses, and transfer of the signals to the PC for post processing. The sequencing of transducer excitation, digitiser configuration and subsequent data analysis was performed by a rule based Real-Time Expert System. Then from the information gathered, the Expert System applies knowledge via a series of software coded rules and provides any one of the following conditions: speed in the water (u_{water}), speed in the solid bottom (u_{solid}) and speed in the potential reservoir (u_{oil}),

3. The General Type of Refraction for Real-time Expert Seismology

Generally, the seismic refraction method is similar to the reflection method in that the same instruments and shock wave sources are used. However, as the name implies, the objective of the refraction method is to measure refraction of shock waves as they pass across formation or structural boundaries (Figure 4). Furthermore, refraction is governed by Snell's Law, which relates velocity to the angle of incidence and to the angle of refraction.

The travel time T_1 of the seismic waves in the first solid is given by the formula:

$$T_1 = \frac{2 \left(d_1^2 + \left(\frac{x}{2} - x_{l_1} - x_{l_2} \right)^2 \right)^{1/2}}{v_1} \quad (3.1)$$

where d_1 denotes the depth, x the distance between source of wave and the geophone or hydrophone detector, x_{l_1} the distance between the ends of the first two waves (Figure 4), x_{l_2} the

distance between the ends of the next two waves (Figure 4), and v_1 is the speed of the wave in the first solid.

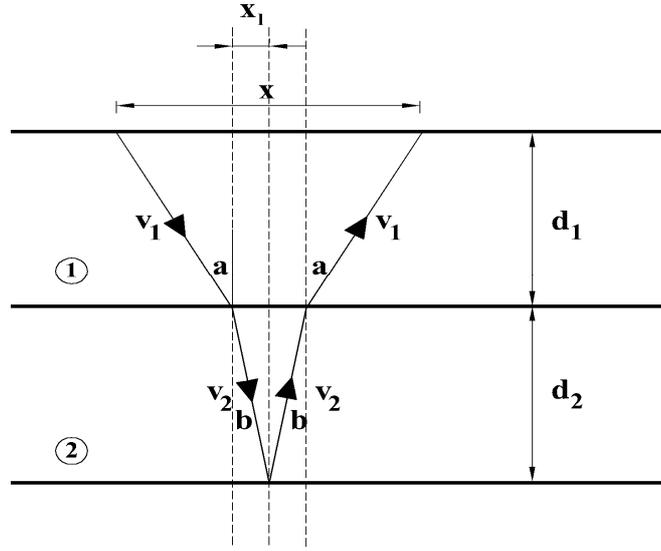


Fig. 4 Law of Refraction.

Then from (3.1) follows equation (3.2):

$$T_1^2 = \frac{4 \left(d_1^2 + \left(\frac{x}{2} - x_{l_1} - x_{l_2} \right)^2 \right)}{v_1^2} \quad (3.2)$$

Also, the normal incident time T_{1o} is given by the relation:

$$T_{1o} = \frac{2d_1}{v_1}$$

(3.3)

From eqs (3.2) and (3.3) we obtain:

$$T_1^2 = T_{1o}^2 + \left[\frac{2 \left(\frac{x}{2} - x_{l_1} - x_{l_2} \right)}{v_1} \right]^2 \quad (3.4)$$

Beyond the above, by replacing (3.3) in (3.4) one has:

$$d_1 = \frac{\left(\frac{x}{2} - x_{l_1} - x_{l_2} \right) T_{1o}}{\left(T_1^2 - T_{1o}^2 \right)^{1/2}} \quad (3.5)$$

By following the same method, then the travel time T_2 of the seismic waves in the second solid is given by the formula:

E.G. Ladopoulos

$$T_2 = \frac{2(d_2^2 + x_{l_1}^2)^{1/2}}{v_2} \quad (3.6)$$

in which d_2 denotes the depth, x_{l_1} the distance between the ends of the two waves (Figure 4) and v_2 is the speed of the wave in the second solid.

So from (3.6) follows equation (3.7):

$$T_2^2 = \frac{4(d_2^2 + x_{l_1}^2)}{v_2^2} \quad (3.7)$$

Moreover, the normal incident time T_{2o} is given by the relation:

$$T_{2o} = T_o - T_{1o} - T_{3o} = \frac{2d_2}{v_2} \quad (3.8)$$

From eqs (3.7) and (3.8) follows:

$$T_2^2 = T_{2o}^2 + \left(\frac{2x_{l_1}}{v_2}\right)^2 \quad (3.9)$$

Furthermore, by replacing (3.8) in (3.9) we obtain:

$$d_2 = \frac{x_{l_1}(T_o - T_{1o})}{\left[(T - T_1)^2 - (T_o - T_{1o})^2\right]^{1/2}} \quad (3.10)$$

Because of Snell's law it is valid:

$$\frac{v_2}{v_1} = \frac{\sin b}{\sin a} \quad (3.11)$$

in which a denotes the angle of incident and b the angle of refraction.

Finally, if T is the total travel time of the waves in the three solids ($T = T_1 + T_2 + T_3$) and by using (3.2), (3.7) and (3.11) one has:

$$\frac{T_1}{T_2} = \frac{x_{l_1} \left(d_1^2 + \left(\frac{x}{2} - x_{l_1} - x_{l_2} \right)^2 \right)}{\left(\frac{x}{2} - x_{l_1} - x_{l_2} \right) (d_2^2 + x_{l_1}^2)} \quad (3.12)$$

By following the same method the travel time T_3 of the seismic waves in the third solid is given as following:

$$T_3 = \frac{2(d_3^2 + x_{l_2}^2)^{1/2}}{v_3} \quad (3.13)$$

E.G. Ladopoulos

in which d_3 denotes the depth, x_{l_2} the distance between the ends of the next two waves (Figure 4) and v_3 is the speed of the wave in the third solid.

Then from (3.13) follows equation (3.14):

$$T_3^2 = \frac{4(d_2^2 + x_{l_2}^2)}{v_3^2} \quad (3.14)$$

Beyond the above, the normal incident time T_{3o} is given by the formula:

$$T_{3o} = T_o - T_{1o} - T_{2o} = \frac{2d_3}{v_3} \quad (3.15)$$

From eqs (3.14) and (3.15) one has:

$$T_3^2 = T_{3o}^2 + \left(\frac{2x_{l_2}}{v_3} \right)^2 \quad (3.16)$$

Also, by replacing (3.15) in (3.16) one obtains:

$$d_3 = \frac{x_{l_2}(T_o - T_{1o} - T_{2o})}{\left[(T - T_1 - T_2)^2 - (T_o - T_{1o} - T_{2o})^2 \right]^{1/2}} \quad (3.17)$$

Because of Snell's law we have:

$$\frac{v_3}{v_2} = \frac{\sin c}{\sin b} \quad (3.18)$$

where b denotes the angle of incident and c the angle of refraction.

Finally, if T is the total travel time of the waves in the three solids ($T = T_1 + T_2 + T_3$) and by using (3.9), (3.14) and (3.18) follows:

$$\frac{T_2}{T_3} = \frac{x_{l_2}}{x_{l_1}} \left(\frac{d_2^2 + x_{l_1}^2}{d_3^2 + x_{l_2}^2} \right)^{1/2} \quad (3.19)$$

From equations (3.12) and (3.19) can be calculated the unknown x_{l_1} and x_{l_2} .

By following the same method if the elastic waves travel inside m solids, then d_m is calculated by the formula:

$$d_m = \frac{x_{l_{m-1}}(T_o - T_{1o} - T_{2o} - \dots - T_{(m-1)o})}{\left[(T - T_1 - T_2 - \dots - T_{(m-1)})^2 - (T_o - T_{1o} - T_{2o} - \dots - T_{(m-1)o})^2 \right]^{1/2}} \quad (3.20)$$

which reduces to:

$$d_m = \frac{x_{l_{m-1}} (T_0 - \sum_{i=1}^{m-1} T_{i0})}{\left[(T - \sum_{i=1}^{m-1} T_i)^2 - (T_0 - \sum_{i=1}^{m-1} T_{i0})^2 \right]^{1/2}} \quad (3.21)$$

Finally, between the m and the (m-1) solid the following relation is valid:

$$\frac{T_{m-1}}{T_m} = \frac{x_{l_{m-1}}}{x_{l_{m-2}}} \left(\frac{d_{m-1}^2 + x_{l_{m-2}}^2}{d_m^2 + x_{l_{m-1}}^2} \right)^{1/2} \quad (3.22)$$

4. Oil and Gas Reserves Exploration by Real-time Logic

Real-time logic (RTL) is a reasoning system for real-time properties of computer based systems. RTL's computational model consists of events, actions, causality relations, and timing constraints. Such a model is expressed in a first order logic describing the system properties as well as the systems dependency on external events. The Real - Time Logic system introduces time to the first logic formulas with an event occurrence function denoted @. Such function assigns time values to event occurrences. This kind of real - time logic systems were studied by F. Jahanian and A. Mok [25] ,[26].

Furthermore, real-time computing in common practice is characterized by two major criteria: deterministic and fast response to external stimulation, and both human and sensor and actor based interaction with the external world. Thus, it is clear that Real-time is an external requirement for a peace of software; it is not a programming technology. There are some special software tools for the implementation of real - time systems. Such a type of real - time programming languages were investigated by several scientists like R.Emnis et all [27] , W. Fritz , V. H. Haase and R. Kalcher [28] and V. H. Haase [29] .

RTL uses the following three types of constraints:

- a. Event constants are divided into three cases. Start/stop events describe the initiation/termination of an action or subaction. Transition events are those which make a change in state attributes. In other words a transition event changes an assertion about the state of the real-time system or its environment. The third class, which are the external events, includes those that can be impact the system behavior, but cannot be caused by the system.
- b. Action constants may be primitive or composite. In a composite constant, precedence is imposed by the event-action model using sequential or parallel relations between actions.
- c. Integers assigned by the occurrence function provide time values, and also denote the number of an event occurrence in a sequence.

Real Time Logic translates assertions about the physical state of the system over time into **algebraic relations**. Such relations describe the occurrences of the appropriate transition events, using equality and inequality predicates. Real Time Logic uses state predicates as a notation device for asserting truth-values to attributes during a time interval.

There is a set of axioms from the event-action model of the system, by translating the system specifications and characterizing following properties:

- a. Relations between actions and their start/stop events.
- b. The sporadic and periodic event constraints.

- c. The cause relations which may initiate a transition event.
- d. Some artificial constraints can be added to the specification, in order to prevent the scheduler from executing particular actions. This is a useful way to prevent execution of actions that are not required.

Beyond the above, the Real - Time Logic System introduces time to the first order logic formulas with an event occurrence function denoted by @. The mechanism to achieve a timing property of a system is the deduction resolution.

So, consider the following example: Upon pressing button ≠ 1, action TEST is executed within 400 time units. During each execution of this action, the information is sampled and subsequently transmitted to the display panel. Also, the computation time of action TEST is 200 time units.

This example can be further translated into the following two formulas:

$$\begin{aligned} \forall x : @(\Omega \text{ button } 1, x) &\leq @(\uparrow \text{ TEST}, x) \wedge \\ &@(\downarrow \text{ TEST}, x) \leq @(\Omega \text{ button } 1, x) + 400 \\ \forall y : @(\uparrow \text{ TEST}, y) + 200 &\leq @(\downarrow \text{ TEST}, y) \end{aligned}$$

and safety assertions are then derived.

5. Elastic Seismic Waves for Oil and Gas Reservoir Exploration

We suppose that a seismic wave of any sort travels from left to right in a medium. Then the equation of the travelling wave is given by the relation:

$$y(\zeta, t) = A \cos(\omega t - k\zeta) \tag{5.1}$$

where k denotes the wave number given by the formula:

$$k = 2\pi / \lambda \tag{5.2}$$

and λ is the wavelength, t the time, A the amplitude of the motion and $\omega=2\pi\nu$, ν the frequency. A sinusoidal transverse wave travelling toward the right, at intervals of period 1/8 can be seen in Figure 5.

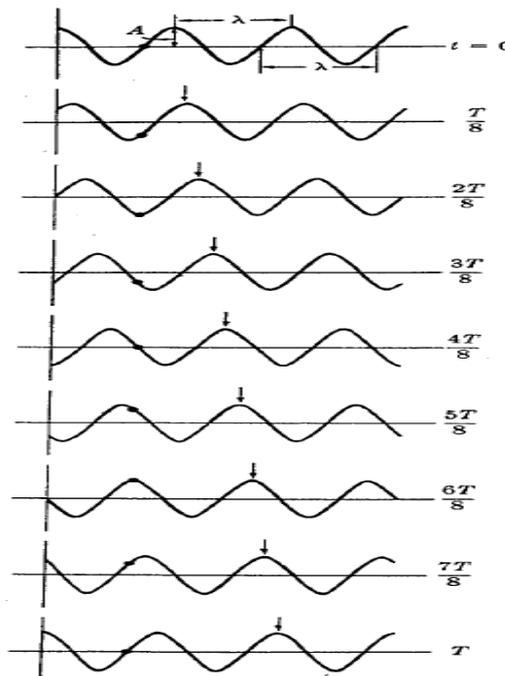


Fig. 5 A sinusoidal transverse wave travelling toward the right, at intervals 1/8 of a period.

Also, it is very important to distinguish between the motion of the waveform, which moves with constant velocity u along the string, and the motion of a particle of the string, which is simple harmonic and transverse to the string. In order to be understandable the mechanics of seismic waves, consider Figure 6.

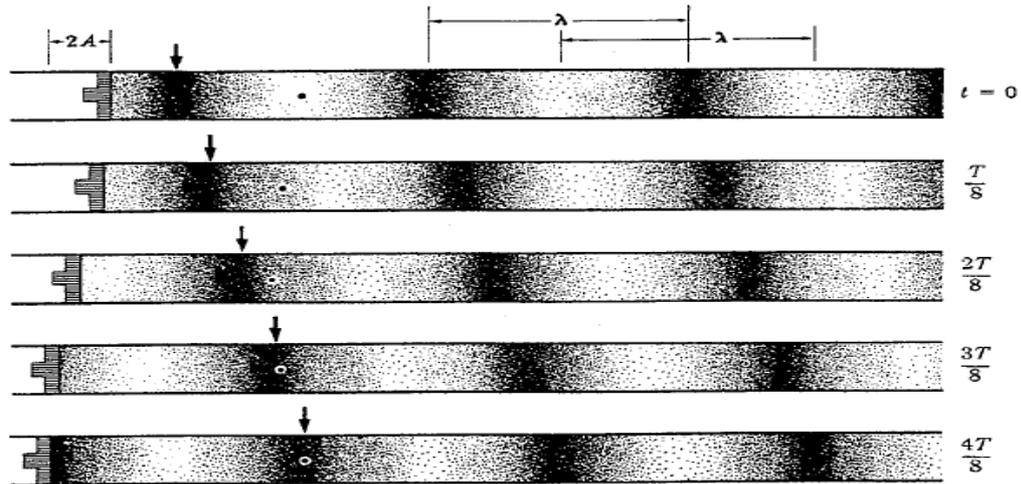


Fig. 6 Sinusoidal longitudinal waves, travelling toward the right, at intervals 1/8 of a period.

Beyond the above, by differentiating the wave equation (5.1) one has:

$$\frac{\partial y}{\partial z} = kA \sin(\omega t - kz) \quad (5.3)$$

$$\frac{\partial y}{\partial t} = -\omega A \sin(\omega t - kz) \quad (5.4)$$

By combining eqs {5.3} and {5.4} and as the velocity is equal to:

$$u = \omega / k \quad (5.5)$$

then finally we obtain:

$$\frac{\partial y}{\partial \zeta} = -\frac{1}{u} \frac{\partial y}{\partial t} \quad (5.6)$$

which by a second differentiation reduces to:

$$\frac{\partial^2 y}{\partial t^2} = u^2 \frac{\partial^2 y}{\partial \zeta^2} \quad (5.7)$$

In general, in a transverse wave motion the individual particles vibrate in a direction perpendicular to the direction of propagation of the wave. But there are many such directions - indeed, there are infinitely many. Thus, in Figure 7 can be seen three transverse waves, all travelling in the same direction, but lying in different planes from one another: A in a vertical plane, B in a horizontal plane, C in a plane inclined at an angle of 45° to each of these. In each of the above cases the motion of each individual particle is restricted to a single straight line, and the entire wave to a single plane. Each of these waves is said to be plane - polarized. Furthermore,

because of their non - linear behavior, are called non - linear plane - polarized. But more complex seismic waves could be generated by moving one end in any periodic manner, not restricted to a single straight line. In such cases, each particle has two - dimensional motion (it moves in a plane) and the entire wave is three - dimensional. Even then the wave is not necessarily un-polarized, while if the vibrations are ordered in any case, the wave is to some degree polarized.

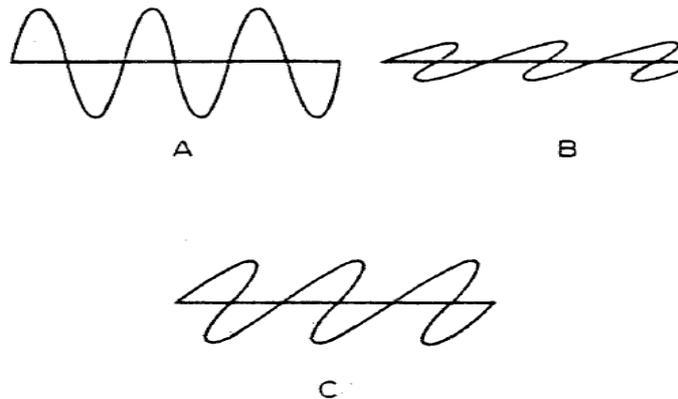


Fig. 7 Transverse waves, travelling in the same direction, but lying in different planes from one another.

6. Conclusions

By the present research the new theory of "*Real-Time Expert Seismology*" has been introduced and investigated for the exploration of on-shore and off-shore oil and gas reserves. As the test marine drillings are very expensive with costs of many billions and many times unsuccessfully, which means a big loss of funds, then the highly innovative and groundbreaking method "*Real-Time Expert Seismology*" has been proposed and investigated. By this new and very sophisticated technology for energy applications it will be established a strong scientific and technical base for the Science & Technology worldwide in the emerging areas of oil reserves exploration in the energy field. Hence, through the new technology of "*Real-Time Expert Seismology*", will be effected the exploration of a significant part of on-shore and off-shore oil and gas reserves all over the world very fast and by a low cost.

The oil and gas markets are of value of many billions every year worldwide. So, such a contribution requires an international approach, rather than a local approach, as it is referred to a market all over the world with value of many billions. Thus it is expected in order the big oil companies to keep and to improve their leading role in the worldwide Science & Technology in the petroleum field, to get involved in the new and groundbreaking technology in the area of Energy, which is proposed by the present investigation.

Beyond the above, the potential areas and markets of application of the proposed technology will be the oil market all over the world. Our method's results will be applicable to all oil companies and scientific organizations working on oil exploration all over the world. It is expected through our proposed new and modern technology the cost for oil exploration to be reduced too much, as there will be no need for so many test drillings, as today. The test drillings cost many billions every year, and the new technology will reduce them in the possible minimum.

Finally, as the proposed new technology "*Real-Time Expert Seismology*", is based on a very sophisticated non-linear 3-D elastic waves real - time expert system, working under real logic, then we expect to get the best results. So, our proposed high technology method is based on a very sophisticated model by checking the geological anticlines of the bottom of the sea, in order to decide which areas of the bottom have the most possibilities to include petroleum. It is therefore not necessary to make test drillings in the half ocean in order to find petroleum, like the existing methods.

References

1. Aki K. and Richards P., 'Quantitative Seismology, Theory and Methods', Freeman Press, San Francisco, 1980.
2. Hale D., 'Dip-move out by Fourier transform', *Geophysics*, **49** (1984), 741 – 757.
3. Thomsen, L., 'Reflection seismology over azimuthally anisotropic media', *Geophysics*, **51** (1988), 304 – 313.
4. Thomsen L., 'Converted-wave reflection seismology over inhomogeneous, anisotropic media', *Geophysics*, **64** (1999), 678 - 690.
5. Dellinger J. A., Muir F. and Karrenbach M., 'Anelliptic approximations for TI media', *J. Seismic Exploration*, **2** (1993), 23 – 40.
6. Harrison M. and Stewart R., 'Poststack migration of P-SV seismic data', *Geophysics*, **8** (1993), 1127 – 1135.
7. Tsvankin I. and Thomsen L., 'Nonhyperbolic reflection moveout in anisotropic media', *Geophysics*, **59** (1994), 1290 – 1304.
8. Alkhalifah T. and Tsvankin I., 'Velocity analysis for transversely isotropic media', *Geophysics*, **60** (1995), 1550 – 1566.
9. Gaiser J. E., '3-D converted shear wave rotation with layer stripping', U.S. Patent. 5 610 875, 1997.
10. Ladopoulos E.G., 'Non-linear singular integral representation for petroleum reservoir engineering', *Acta Mech.*, **220** (2011), 247-253.
11. Ladopoulos E.G., 'Petroleum reservoir engineering by non-linear singular integral equations', *Mech. Engng Res.*, **1** (2011), 1-10.
12. Ladopoulos E.G., 'Hydrocarbon reserves exploration by real-time expert seismology and non-linear singular integral equations', *Int. J. Oil Gas Coal Tech.*, **5** (2012), 299 - 315.
13. Ladopoulos E.G., 'Non-linear singular integral representation for unsteady inviscid flowfields of 2-D airfoils', *Mech. Res. Commun.*, **22** (1995), 25 – 34.
14. Ladopoulos E.G., 'Non-linear singular integral computational analysis for unsteady flow problems', *Renew. Energy*, **6** (1995), 901 – 906.
15. Ladopoulos E.G. and Zisis V.A., 'Non-linear singular integral approximations in Banach spaces', *Nonlin. Anal., Theor. Math. Appl.*, **26** (1996), 1293 – 1299.
16. Ladopoulos E.G. and Zisis V.A., 'Existence and uniqueness for non-linear singular integral equations used in fluid mechanics', *Appl. Math.*, **42** (1997), 345 – 367.
17. Ladopoulos E.G., 'Non-linear singular integral representation analysis for inviscid flowfields of unsteady airfoils', *Int. J. Non-Lin. Mech.*, **32** (1997), 377 – 384.
18. Ladopoulos E.G., 'Collocation approximation methods for non-linear singular integro-differential equations in Banach Spaces', *J. Comp. Appl. Math.*, **79** (1997), 289 – 297.
19. Ladopoulos E.G., 'Non-linear multidimensional singular integral equations in 2-dimensional fluid mechanics analysis', *Int. J. Non-Lin. Mech.*, **35** (2000), 701-708.
20. Ladopoulos E.G. and Zisis V.A., 'Non-linear finite-part singular integral equations arising in two-dimensional fluid mechanics', *Nonlin. Anal., Th. Meth. Appl.*, **42** (2000), 277-290.
21. Ladopoulos E.G., 'Singular Integral Equations, Linear and Non-Linear Theory and its Applications in Science and Engineering', Springer Verlag, New York, Berlin, 2000.
22. Ladopoulos E.G., 'Non-linear unsteady flow problems by multidimensional singular integral representation analysis', *Int. J. Math. Math. Scien.*, **2003** (2003), 3203-3216.
23. Ladopoulos E.G., 'Non-linear two-dimensional aerodynamics by multidimensional singular integral computational analysis', *Forsh. Ingen.*, **68** (2003), 105-110.
24. Ladopoulos E.G., 'Unsteady inviscid flowfields of 2-D airfoils by non-linear singular integral computational analysis', *Int. J. Nonlin. Mech.*, **46** (2011), 1022-1026.
25. Jahanian F. and Mok A., 'Safety Analysis of Timing Properties in Real Time Systems', Dep. Comput. Scien., University of Texas at Austin, 1985.
26. Jahanian F. and Mok A., 'A Graph-Theoretic Approach for Timing Analysis in Real-Time Logic', *Proc. Real-Time Systems Symp. (IEEE)*, p.p. 98-108, New Orleans, LA, 1986.
27. Emnis R. et al, 'A Continuous Real-Time Expert System for Computer Operations', IBM J. Research Devel., 1986.
28. Fritz W., Haase V.H. and Kalcher R., 'The use of standard software in real time programming - an example demonstrating the integration of ADA, Oracle and GKS', in Puente J. (ed) Proc. 15th IFAC/IFAP Workshop on Real Time Program, Pergamon, 1988.
29. Haase V.H., 'The use of AI-Methods in the implementation of real-time software products', IFAC 11 th Triennial World Con., Tallium, Estonia, 1990.