

Non-linear Real-time Expert Seismology for Petroleum Reservoir Exploration

E.G. Ladopoulos
Interpaper Research Organization
8, Dimaki Str.
Athens, GR - 106 72, Greece
eladopoulos@interpaper.org

Abstract

By the present investigation the new theory of "*Real-Time Expert Seismology*" is proposed, by using a non-linear 3-D elastic waves real - time expert system for the exploration of the marine and land oil reservoir all over the world. Such a Generic Technology will work under Real Time Logic for searching the marine and land petroleum reservoir developed on the continental crust and on deeper water ranging from 300 to 2000 m, or even much more. Thus, the above real - time expert system, will be the best device for the exploration of the continental margin areas (shelf, slope and rise) and the very deep waters, too. Furthermore, the proposed real-time expert system will be suitable for the exploration of land oil reserves, as well. The main objectives for exploration of marine and land petroleum reserves are to locate, characterize and evaluate the size of such resources all over the world. There is therefore a research and development responsibility for the acquisition and analysis of geophysical, geological and reservoir engineering data for the land and the seas in the whole earth, in order to be explored their oil and gas reserves. So, through the new technology of "*Real-time Expert Seismology*", will be effected the exploration of a significant part of marine and land oil reserves fastly and by a low cost.

Key Word and Phrases

Real-time Expert Seismology, Non-linear Real - Time Expert System, Real - Time Logic, Marine Oil Reserves, Land Oil Reserves, Generic Technology.

1. Introduction

There are three basic areas for the research and investigation aspects of land and marine petroleum reservoir:

- (a) The acquisition and analysis for the geophysical, geological and reservoir engineering data to enable an appreciation to be made of the petroleum reserves.
- (b) The determination of the necessary standards and data for the safety to offshore and land operations.
- (c) To assist the development of the offshore and land supplies industry, and to enable it to play a full part in the development of the marine and land oil and gas resources in worldwide markets in the future.

There is further a considerable feeling by worldwide oil companies and scientific petroleum institutes that the unexplored land and marine petroleum & gas resources should be too many, many times more than the terrestrial reserves of Middle - East. Furthermore, many recent test drillings in the Continental Shelf of Europe and rest world have shown the existence of petroleum reserves.

Beyond the above, the usual probability considerations indicate that marine oil reserves will be found in areas of thick sedimentary sequences developed on the continental crust. Thus, if this is true, then the continental margin areas (shelf, slope and rise) should offer good prospects of containing hydrocarbon resources. However, up to present the potential of sediments both on and off the shelf remains unquantified. In addition, there are deep waters prospects in the seas all over the world, but because of the paucity of the available information it is not possible at present to quantify the amounts that may be recoverable from them.

Since 1920 the basic and prevalent theory on oil reserves exploration, has been "*Reflection Seismology*". According to the above method the basic idea is to collect reflections of elastic (seismic) waves and then through various mathematical operations, by using Snell's law and

Zoeppritz equations to convert them to maps of the earth's structure. [1] - [9]. Infer location of oil and gas from structural maps, sometimes of character of reflections, too. The method of "Reflection Seismology" for almost a century, has been therefore used with several improvements for oil and gas reserves exploration.

On the other hand, in the present research for the land and marine oil reserves exploration the new theory of "*Real-time Expert Seismology*" is investigated, as was very recently proposed by E.G.Ladopoulos [10]-[12]. Furthermore, this is an extension of the non-linear methods for fluid mechanics as proposed by E.G.Ladopoulos et al. [13]-[24]. Thus, "*Real-time Expert Seismology*" is a very "*innovative*" and "*groundbreaking*" method on oil reserves exploration. According to the new theory a non-linear 3-D elastic waves real - time expert system is proposed for the exploration of the oil reserves worldwide, including the marine oil reserves, of the seas all over the world. The above Generic Technology will work under Real Time Logic [25]-[29] for searching marine reserves developed on the continental crust and on deeper water ranging from 300 to 2000 m, or even much more. Hence, the proposed real - time expert system will be the best device for the exploration of the continental margin areas (shelf, slope and rise) and the very deep waters, too. Also, this expert system will be suitable for the exploration of land oil reserves, as well.

Many basic benefits of the new theory of "Real-time Expert Seismology" in comparison to the existing theory of "Reflection Seismology" are valid. Some of them are the following:

A) The new theory "*Real-time Expert Seismology*" is based on the special form of the geological anticlines of the bottom of the sea, in order to decide which areas of the bottom have the most possibilities to include oil reserves.

On the other hand, the existing theory is only based to the best chance and do not include any theoretical and sophisticated model. Currently oil companies by using the existing method must make many expensive test drillings in big areas of seas, if they want to have a chance to find oil reserves.

B) The new theory of elastic (sound) waves is based on the difference of the speed of the sound waves which are travelling through solid, liquid, or gas. In a solid the elastic waves are moving faster than in a liquid and the air, and in a liquid faster than in the air.

Existing theory is based on the application of Snell's law and Zoeppritz equations, which are not giving good results, as these which we are expecting with the new method.

C) The new theory "*Real-time Expert Seismology*" is based on a Real-time Expert System working under Real Time Logic, that gives results in real time, which means every second.

Existing theory do not include real time logic.

From the above mentioned three points it can be well understood the evidence of the applicability of the new method of "Real-time Expert Seismology". Also its novelty, as it is based mostly on a theoretical and very sophisticated Real-time Expert model and not to practical tools like the existing method.

2. Real-time Expert Seismology

Generally, marine operations consist of 90% of all data collected worldwide for oil reserves exploration. Furthermore, international oil companies and research organisations by studying geological surveys all over the world indicate that oil reserves do not necessarily end at the edge of the continental shelf. Thus there is serious expectation that main resources will be found in areas of thick sedimentary sequences developed on the continental crust. So, there are good possibilities for finding marine oil reserves in deep waters, too. These reserves will be on the shelf, slope and rise of the Earth's margin, and the depths of water would not only range up to 300 m, but also in deep waters ranging from 300 m to approaching 2000 m, or even much more.

Beyond the above, the behavior of a reservoir, depends not only on the properties of the liquid and gas, but also on a series of factors that may be termed as the "*properties of the environment*". Among these properties are items like capillary - pressure effects, the reaction of rock when subjected to high stress, pressure and temperature gradients at the shallower levels in the Earth's crust and influences of the compressibility as pressure are reduced by fluid withdrawals.

E.G. Ladopoulos

On the other hand, there are four basic conditions that must be satisfied so that a geological formation, or a part thereof, should form a suitable reservoir, for example for the accumulation of oil or gas. These are porosity, permeability, seal and closure. Porosity defines the pore space in the rock - space in which the oil may collect. Permeability is the attribute of the rock that permits the passage of fluid through it. Generally, it is a measure of the degree interconnectedness, of the pore space, but some reservoir (e.g. in the massive limestone deposits, or in igneous intrusions) depends for fluid flow on a network of fractures within the rock.

Moreover, the seal is the "cup" of the reservoir and prevents the oil from leaking away. Also, closure is a measure of the vertical extent of the sealed trap or, in the case of resources accumulation bounded below by a moving body of water, of the "height" of the sealed trap where that height is measured along a line perpendicular to the oil - water contact.

Almost all resources occur in porous sandstones or limestones and in sedimentary basins, and that seal or cap rock is often a clay or shale, or massive unfractured limestone having little or no permeability. Beyond the above, three general categories of resources can be mentioned for marine reserves: structural traps, stratigraphic traps and combination traps.

On the other hand, elastic waves are sound waves, generally three - dimensional which may be transmitted through matter in any phase - solid, liquid, or gas. Any body vibrating in air gives rise to such waves, as it alternately compresses and rarefies the air adjacent to its surfaces. Also, a body vibrating in a liquid, or in contact with a solid, likewise generates similar longitudinal waves. The frequency of the waves is of course the same as the frequency of the vibrating body that produces them. There are two types of elastic waves produced: A) P-waves, which are primary or "compressional" waves, and B) S-waves, or shear waves.

The distance between two successive maxima (or between any two successive points in the same phase) is the wavelength of the wave and is denoted by l . Since the waveform, travelling with constant velocity u , advances a distance of one wavelength in a time interval of one period, it follows that the velocity of sound waves u is given by the following formula:

$$u = l v \quad (2.1)$$

in which v denotes the frequency.

It is obvious that the velocity u differs when the sound waves are travelling through solid, liquid, or gas. In a solid the elastic waves are moving faster than in a liquid and the air, and in a liquid faster than in the air. If therefore is somebody searching for example for oil marine resources over the sea, by transmitting sound waves, then there will be a difference in the velocity of the waves in the sea, the solid bottom and in a potential reservoir.

So that the new technology to be better explained, consider the example of Figure 1. In this case consider that in the bottom of the sea there is a potential petroleum reservoir. Then, the speed of the elastic waves in the air (u_{air}), will be different from the speed in the water (u_{water}), and different from the speed in the solid bottom (u_{solid}) and different from the speed in the potential reservoir (u_{oil}), while the frequency of the elastic waves remaining the same when transmitted through every different matter.

Thus, a real - time non-linear 3-D plane - polarized elastic waves expert system is proposed in order to explore the land and marine oil resources, according to the new theory of "*Real-time Expert Seismology*", in contrast to the old theory of "*Reflection Seismology*". This Generic Sound Waves Technology will work under Real Time Logic for searching marine oil reservoir developed on the continental crust and on deeper waters ranging from 300 m to 2000 m, or even much deeper

(Figure 2). There are many deeper water prospects around the seas all over the world, but because of the paucity of the available information it is not possible at present to quantify the amounts that may be recoverable from them.

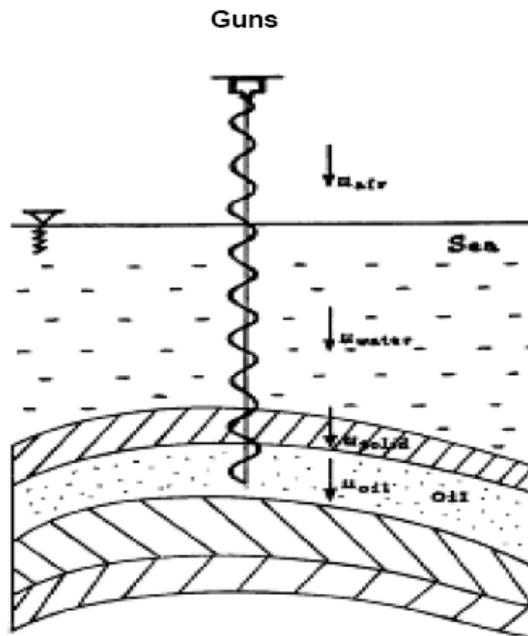


Fig. 1 Elastic Waves Method for the Exploration of Oil Reserves.

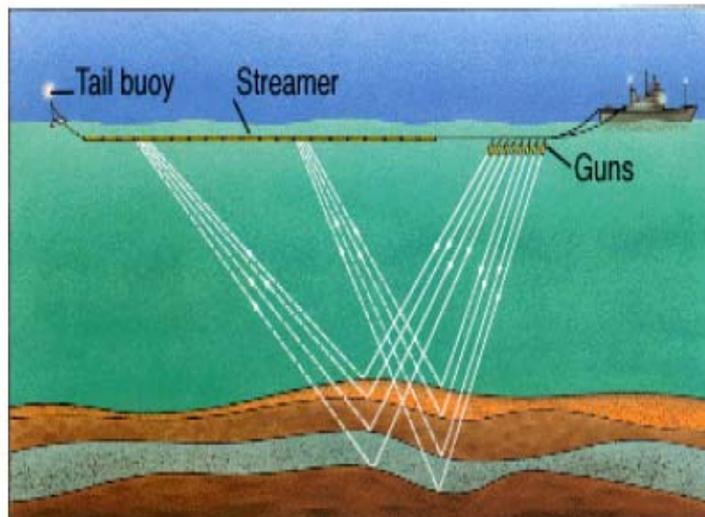


Fig. 2 Real-time Expert Seismology.

So the proposed real - time elastic waves expert system will be the best device for the exploration of the continental margin areas (shelf, slope and rise) and the very deep waters, too. Thus, through the new technology of "Real-time Expert Seismology", will be effected the exploration of a significant part of marine and land oil reserves very fast and by a low cost.

According to our proposed theory of "Real-time Expert Seismology" the average velocity of the sound waves is calculated by providing important information about the composition of the solids through of which passed the sound waves. For example the velocity of the sound waves through the air is 331 m/sec, through liquid 1500 m/sec and through sedimentary rock 2000 to 5000 m/sec. Furthermore, according to the law of Reflection the angle of reflection equals the angle of incidence (Figure 3). Then according to the new technique the arrival times of the seismic waves are analyzed. After the sensor measures the precise arrival time of the wave, then the velocity of the wave can be calculated by using the following method.

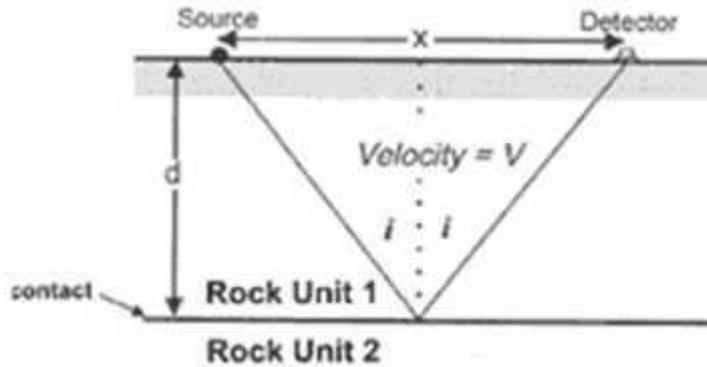


Fig. 3 Law of Reflection.

The travel time T of the seismic waves is given as following:

$$T = \frac{2\left(d^2 + \frac{x^2}{4}\right)^{1/2}}{v} \quad (2.2)$$

where d denotes the depth, x the distance between source of wave and the geophone or hydrophone detector and v is the average speed.

From (2.2) follows equation (2.3):

$$T^2 = \frac{4d^2 + x^2}{v^2} \quad (2.3)$$

Beyond the above, the normal incident time T_o is given by the formula:

$$T_o = \frac{2d}{v} \quad (2.4)$$

From eqs (2.3) and (2.4) follows:

$$T^2 - T_o^2 = \frac{x^2}{v^2} \quad (2.5)$$

and finally from (2.5) the mean velocity is equal to:

$$v = \left(\frac{x^2}{T^2 - T_o^2} \right)^{1/2} \quad (2.6)$$

Hence, a real time expert system is used and the apparatus permitted excitation of any combination of elements and reception of any other, visual analysis of the responses, and transfer of the signals to the PC for post processing. The sequencing of transducer excitation, digitiser configuration and subsequent data analysis was performed by a rule based Real-Time Expert System. Then from the information gathered, the Expert System applies knowledge via a series of software coded rules and provides any one of the following conditions: speed in the water (u_{water}), speed in the solid bottom (u_{solid}) and speed in the potential reservoir (u_{oil}),

3. Refractions for Real-time Expert Seismology

The seismic refraction method is similar to the reflection method in that the same instruments and shock wave sources are used. However, as the name implies, the objective is to measure refraction of shock waves as they pass across formation or structural boundaries (Figure 4). Refraction is governed by Snell's Law, which relates velocity to the angle of incidence and to the angle of refraction.

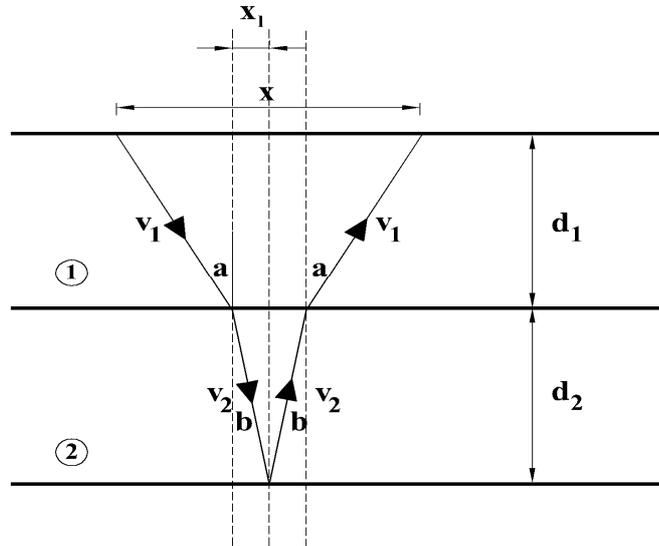


Fig. 4 Law of Refraction..

The travel time T_1 of the seismic waves in the first solid is given by the relation:

$$T_1 = \frac{2 \left(d_1^2 + \left(\frac{x}{2} - x_1 \right)^2 \right)^{1/2}}{v_1} \quad (3.1)$$

E.G. Ladopoulos

where d_1 denotes the depth, x the distance between source of wave and the geophone or hydrophone detector, x_l the distance between the ends of the two waves (Figure 4) and v_1 is the speed of the wave in the first solid.

From (3.1) follows equation (3.2):

$$T_1^2 = \frac{4\left(d_1^2 + \left(\frac{x}{2} - x_l\right)^2\right)}{v_1^2} \quad (3.2)$$

Furthermore, the normal incident time T_{1o} is given by the formula:

$$T_{1o} = \frac{2d_1}{v_1} \quad (3.3)$$

From eqs (3.2) and (3.3) follows:

$$T_1^2 = T_{1o}^2 + \left[\frac{2\left(\frac{x}{2} - x_l\right)}{v_1} \right]^2 \quad (3.4)$$

Also, by replacing (3.3) in (3.4) one obtains:

$$d_1 = \frac{\left(\frac{x}{2} - x_l\right)T_{1o}}{(T_1^2 - T_{1o}^2)^{1/2}} \quad (3.5)$$

By the same way the travel time T_2 of the seismic waves in the second solid is given as follows:

$$T_2 = \frac{2(d_2^2 + x_l^2)^{1/2}}{v_2} \quad (3.6)$$

where d_2 denotes the depth, x_l the distance between the ends of the two waves (Figure 4) and v_2 is the speed of the wave in the second solid.

From (3.6) follows equation (3.7):

$$T_2^2 = \frac{4(d_2^2 + x_l^2)}{v_2^2} \quad (3.7)$$

Furthermore, the normal incident time T_{2o} is given by the formula:

$$T_{2o} = T_o - T_{1o} = \frac{2d_2}{v_2} \quad (3.8)$$

From eqs (3.7) and (3.8) follows:

$$T_2^2 = T_{2o}^2 + \left(\frac{2x_l}{v_2} \right)^2 \quad (3.9)$$

Also, by replacing (3.8) in (3.9) we obtain:

$$d_2 = \frac{x_l(T_0 - T_{1o})}{\left[(T - T_1)^2 - (T_o - T_{1o})^2 \right]^{1/2}} \quad (3.10)$$

Furthermore, because of Snell's law it is valid:

$$\frac{v_2}{v_1} = \frac{\sin b}{\sin a} \quad (3.11)$$

where a denotes the angle of incident and b the angle of refraction.

Finally, if T is the total travel time of the waves in both solids ($T = T_1 + T_2$) and by using (3.2), (3.7) and (3.11) follows:

$$\frac{T_1}{T - T_1} = \frac{x_l \left(d_1^2 + \left(\frac{x}{2} - x_l \right)^2 \right)}{\left(\frac{x}{2} - x_l \right) (d_2^2 + x_l^2)} \quad (3.12)$$

from which can be calculated x_l .

4. Real-time Logic for Petroleum Reservoir Exploration

Generally, Real-time logic (RTL) is a reasoning system for real-time properties of computer based systems. So, the computational model of Real-time logic consists of events, actions, causality relations, and timing constraint. This model is expressed in a first order logic describing the system properties as well as the systems dependency on external events. The Real - Time Logic system introduces time to the first logic formulas with an event occurrence function, which assign time values to event occurrences. Such a kind of real - time logic systems were studied by F. Jahanian and A. Mok [25] ,[26].

Beyond the above, real-time computing in common practice is characterized by two major criteria: deterministic and fast response to external stimulation, and both human and sensor and actor based interaction with the external world. So, it is clear that Real-time is an external requirement for a peace of software; it is not a programming technology. There are some special software tools for the implementation of real - time systems. Such real - time programming languages were investigated by several scientists like R.Emnis et all [27] , W. Fritz , V. H. Haase and R. Kalcher [28] and V. H. Haase [29] .

In general, Real-Time Logic uses the following three types of constraints:

- A. Action constants may be primitive or composite. In a composite constant, precedence is imposed by the event-action model using sequential or parallel relations between actions.
- B. Event constants are divided into three cases. Start/stop events describe the initiation/termination of an action or subaction. Transition events are those which make a

change in state attributes. This means, that a transition event changes an assertion about the state of the real-time system or its environment. The third class, which are the external events, includes those that can be impact the system behavior, but cannot be caused by the system.

- C. Integers assigned by the accuracy function provide time values, and also denote the number of an event occurrence in a sequence.

Furthermore, the Real - Time Logic System introduces time to the first order logic formulas with an event occurrence function denoted by e . The mechanism to achieve a timing property of a system is the deduction resolution.

Hence, consider the following example: Upon pressing button $\neq 30$, action TEST is extended within 300 time units. During each execution of this action, the information is sampled and subsequently transmitted to the display panel. Also, the computation time of action TEST is 80 time units.

This example can be further translated into the following two formulas:

$$\begin{aligned} \forall x : e(\Omega \text{ button } 30, x) &\leq e(\uparrow \text{ TEST}, x) \wedge \\ &e(\downarrow \text{ TEST}, x) \leq e(\Omega \text{ button } 30, x) + 300 \\ \forall y : e(\uparrow \text{ TEST}, y) + 80 &\leq e(\downarrow \text{ TEST}, y) \end{aligned}$$

5. Elastic Seismic Waves for Oil Exploration

Suppose that a seismic wave of any sort travels from left to right in a medium. Then the equation of the travelling wave is valid as:

$$y(\zeta, t) = A \cos(\omega t - k\zeta) \tag{5.1}$$

in which k denotes the wave number given by the relation:

$$k = 2\pi / \lambda \tag{5.2}$$

and λ is the wavelength, t the time, A the amplitude of the motion and $\omega = 2\pi\nu$, ν the frequency. A sinusoidal transverse wave travelling toward the right, at intervals of period $1/8$ can be seen in Figure 5.

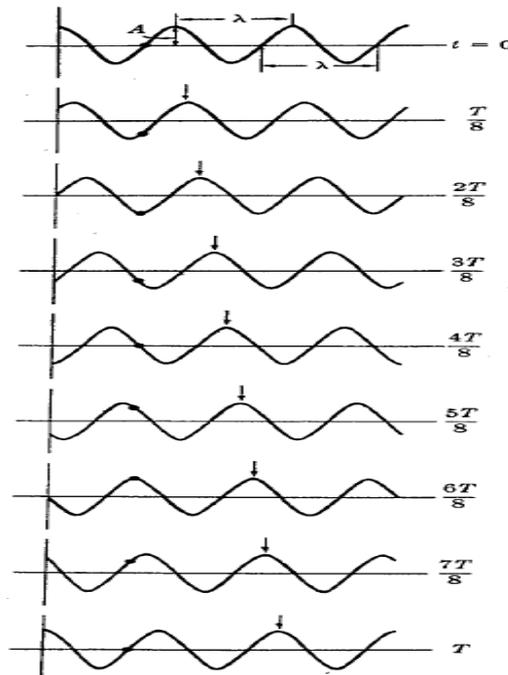


Fig. 5 A sinusoidal transverse wave travelling toward the right, at intervals $1/8$ of a period.

Beyond the above, it is important to distinguish between the motion of the waveform, which moves with constant velocity u along the string, and the motion of a particle of the string, which is simple harmonic and transverse to the string. In order to be understandable the mechanics of seismic waves, consider Figure 6.

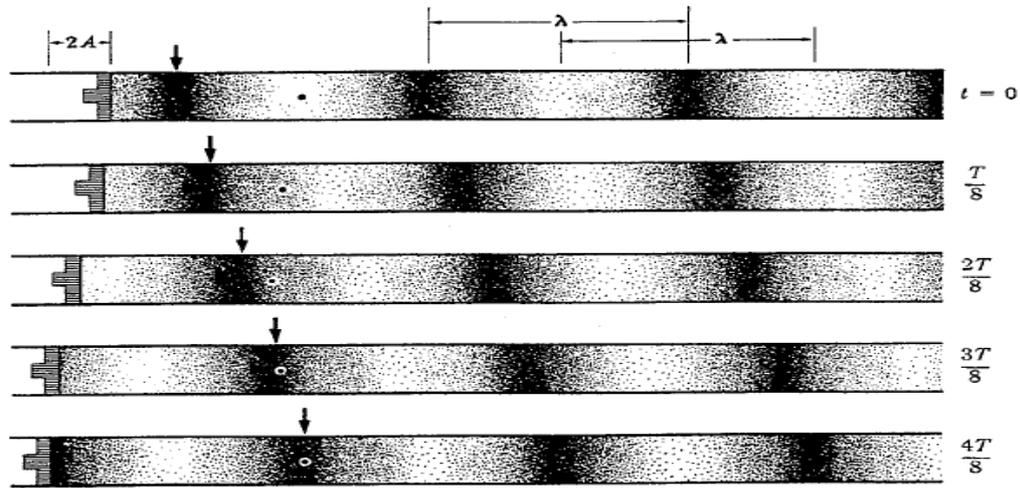


Fig. 6 Sinusoidal longitudinal waves, travelling toward the right, at intervals 1/8 of a period.

Furthermore, by differentiating the wave equation (5.1) we obtain:

$$\frac{\partial y}{\partial z} = kA \sin(\omega t - kz) \quad (5.3)$$

$$\frac{\partial y}{\partial t} = -\omega A \sin(\omega t - kz) \quad (5.4)$$

By combining eqs {5.3) and {5.4) and as the velocity is equal to:

$$u = \omega / k \quad (5.5)$$

Then we finally obtain:

$$\frac{\partial y}{\partial \zeta} = -\frac{1}{u} \frac{\partial y}{\partial t} \quad (5.6)$$

which by a second differentiation reduces to:

$$\frac{\partial^2 y}{\partial t^2} = u^2 \frac{\partial^2 y}{\partial \zeta^2} \quad (5.7)$$

Generally, in a transverse wave motion the individual particles vibrate in a direction perpendicular to the direction of propagation of the wave. But there are many such directions - indeed, there are infinitely many. Hence, in Figure 7 can be seen three transverse waves, all travelling in the same direction, but lying in different planes from one another: A in a vertical plane, B in a horizontal plane, C in a plane inclined at an angle of 45° to each of these. In each case the motion of each individual particle is restricted to a single straight line, and the entire wave to a single plane. Each of these waves is said to be plane - polarized. Also, because of their non - linear behavior, are called non - linear plane - polarized. But more complex seismic waves could be generated by moving one end in any periodic manner, not restricted to a single straight line. In

these cases, each particle has two - dimensional motion (it moves in a plane) and the entire wave is three - dimensional. Even then the wave is not necessarily un-polarized, while if the vibrations are ordered in any case, the wave is to some degree polarized.

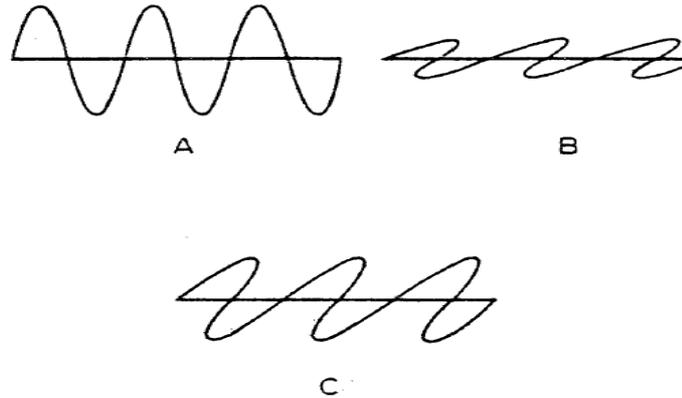


Fig. 7 Transverse waves, travelling in the same direction, but lying in different planes from one another.

6. Conclusions

By the current research the new theory of "*Real-time Expert Seismology*" has been introduced and investigated for the exploration of land and marine oil reserves. As the test marine drillings are very expensive with costs of many millions (or billions) of EURO or USD and many times unsuccessfully, which means a big loss of funds, then the highly innovative and groundbreaking technology "*Real-time Expert Seismology*" has been proposed. By this new and sophisticated technology for energy applications it will be established a strong scientific and technical base for the Science & Technology all over the world in the emerging areas of oil reserves exploration in the energy field. Hence, through the new technology of "*Real-time Expert Seismology*", will be effected the exploration of a significant part of land and marine oil reserves all over the world very fast and by a low cost.

The oil market is a market of many billions every year worldwide. Hence, this contribution requires an international approach, rather than a local approach, as it is referred to a market all over the world with value of many billions of EURO or USD. It is therefore expected in order the big oil companies to keep and to improve their leading role in the Science & Technology in the whole world, to get involved in the new and groundbreaking technology in the area of Energy, which we are proposing.

The potential areas and markets of application of the proposed technology will be therefore the oil market all over the world. The method's results will be applicable to all oil companies and scientific organizations working on oil exploration in the whole world. It is expected through our proposed new technology the cost for oil exploration to be reduced too much, as there will be no need for so many test drillings, as today. The test drillings cost many million (or billion) of EURO or USD, and the new technology will reduce them in the possible minimum.

Beyond the above, as the proposed new technique "*Real-time Expert Seismology*", is based on a non-linear 3-D elastic waves real - time expert system, working under real logic, then is expected to give the best results. Furthermore, our proposed high technology method is based on a very sophisticated model by checking the geological anticlines of the bottom of the sea, in order to decide which areas of the bottom have the most possibilities to include petroleum. So it is not necessary to make test drillings in the half ocean in order to find petroleum, like the existing methods.

References

1. Aki K. and Richards P., 'Quantitative Seismology, Theory and Methods', Freeman Press, San Francisco, 1980.
2. Hale D., 'Dip-move out by Fourier transform', *Geophysics*, **49** (1984), 741 – 757.
3. Thomsen, L., 'Reflection seismology over azimuthally anisotropic media', *Geophysics*, **51** (1988), 304 – 313.
4. Thomsen L., 'Converted-wave reflection seismology over inhomogeneous, anisotropic media', *Geophysics*, **64** (1999), 678 - 690.
5. Dellinger J. A., Muir F. and Karrenbach M., 'Anelliptic approximations for TI media', *J. Seismic Exploration*, **2** (1993), 23 – 40.
6. Harrison M. and Stewart R., 'Poststack migration of P-SV seismic data', *Geophysics*, **8** (1993), 1127 – 1135.
7. Tsvankin I. and Thomsen L., 'Nonhyperbolic reflection moveout in anisotropic media', *Geophysics*, **59** (1994), 1290 – 1304.
8. Alkhalifah T. and Tsvankin I., 'Velocity analysis for transversely isotropic media', *Geophysics*, **60** (1995), 1550 – 1566.
9. Gaiser J. E., '3-D converted shear wave rotation with layer stripping', U.S. Patent. 5 610 875, 1997.
10. Ladopoulos E.G., 'Non-linear singular integral representation for petroleum reservoir engineering', *Acta Mech.*, **220** (2011), 247-253.
11. Ladopoulos E.G., 'Petroleum reservoir engineering by non-linear singular integral equations', *Mech. Engng Res.*, **1** (2011), 1-10.
12. Ladopoulos E.G., 'Hydrocarbon reserves exploration by real-time expert seismology and non-linear singular integral equations', *Int. J. Oil Gas Coal Tech.*, **5** (2012), 299 - 315.
13. Ladopoulos E.G., 'Non-linear singular integral representation for unsteady inviscid flowfields of 2-D airfoils', *Mech. Res. Commun.*, **22** (1995), 25 – 34.
14. Ladopoulos E.G., 'Non-linear singular integral computational analysis for unsteady flow problems', *Renew. Energy*, **6** (1995), 901 – 906.
15. Ladopoulos E.G. and Zisis V.A., 'Non-linear singular integral approximations in Banach spaces', *Nonlin. Anal., Theor. Math. Appl.*, **26** (1996), 1293 – 1299.
16. Ladopoulos E.G. and Zisis V.A., 'Existence and uniqueness for non-linear singular integral equations used in fluid mechanics', *Appl. Math.*, **42** (1997), 345 – 367.
17. Ladopoulos E.G., 'Non-linear singular integral representation analysis for inviscid flowfields of unsteady airfoils', *Int. J. Non-Lin. Mech.*, **32** (1997), 377 – 384.
18. Ladopoulos E.G., 'Collocation approximation methods for non-linear singular integro-differential equations in Banach Spaces', *J. Comp. Appl. Math.*, **79** (1997), 289 – 297.
19. Ladopoulos E.G., 'Non-linear multidimensional singular integral equations in 2-dimensional fluid mechanics analysis', *Int. J. Non-Lin. Mech.*, **35** (2000), 701-708.
20. Ladopoulos E.G. and Zisis V.A., 'Non-linear finite-part singular integral equations arising in two-dimensional fluid mechanics', *Nonlin. Anal., Th. Meth. Appl.*, **42** (2000), 277-290.
21. Ladopoulos E.G., 'Singular Integral Equations, Linear and Non-Linear Theory and its Applications in Science and Engineering', Springer Verlag, New York, Berlin, 2000.
22. Ladopoulos E.G., 'Non-linear unsteady flow problems by multidimensional singular integral representation analysis', *Int. J. Math. Math. Scien.*, **2003** (2003), 3203-3216.
23. Ladopoulos E.G., 'Non-linear two-dimensional aerodynamics by multidimensional singular integral computational analysis', *Forsh. Ingen.*, **68** (2003), 105-110.
24. Ladopoulos E.G., 'Unsteady inviscid flowfields of 2-D airfoils by non-linear singular integral computational analysis', *Int. J. Nonlin. Mech.*, **46** (2011), 1022-1026.
25. Jahanian F. and Mok A., 'Safety Analysis of Timing Properties in Real Time Systems', Dep. Comput. Scien., University of Texas at Austin, 1985.
26. Jahanian F. and Mok A., 'A Graph-Theoretic Approach for Timing Analysis in Real-Time Logic', *Proc. Real-Time Systems Symp. (IEEE)*, p.p. 98-108, New Orleans, LA, 1986.
27. Emnis R. et al, 'A Continuous Real-Time Expert System for Computer Operations', IBM J. Research Devel., 1986.
28. Fritz W., Haase V.H. and Kalcher R, 'The use of standard software in real time programming - an example demonstrating the integration of ADA, Oracle and GKS', in Puente J. (ed) Proc. 15th IFAC/IFAP Workshop on Real Time Program, Pergamon, 1988.
29. Haase V.H., 'The use of AI-Methods in the implementation of real-time software products', IFAC 11 th Triennial World Con., Tallium, Estonia, 1990.